



Overwhelming Beauty

The CJV200 is equipped with a single 330 Series printhead; the same printhead used in Mimaki's flagship dual-head printers. The technology of precise control of a minimum 3pl ink drop ensures the print head delivers high-density prints, even at high speeds, resulting in detailed, beautiful, seamless printing.

Practical 183 ft²/hr



Easy for Everyone

Simple Design

- Single Print Head
- Simple Maintenance

A single print head system contributes less cleaning time and adjustment time. The simple design allows you to work quickly and easily.




- Wide Open Cover for Easy Access

- Up-Facing Control Panel for Easy View

Reduce Ink Consumption with Just 2 Clicks Ink Saving Function

Anyone can easily reduce ink consumption without technical expertise. This function is available with any media and profiles.

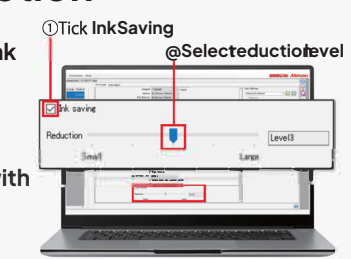


Easy and Precise Automatic Set Up


Automatically performs necessary adjustment at the media setup to ensure optimal image quality at all times. (DAS I Dot Adjustment System)



Reliable Productivity even during Peak Season

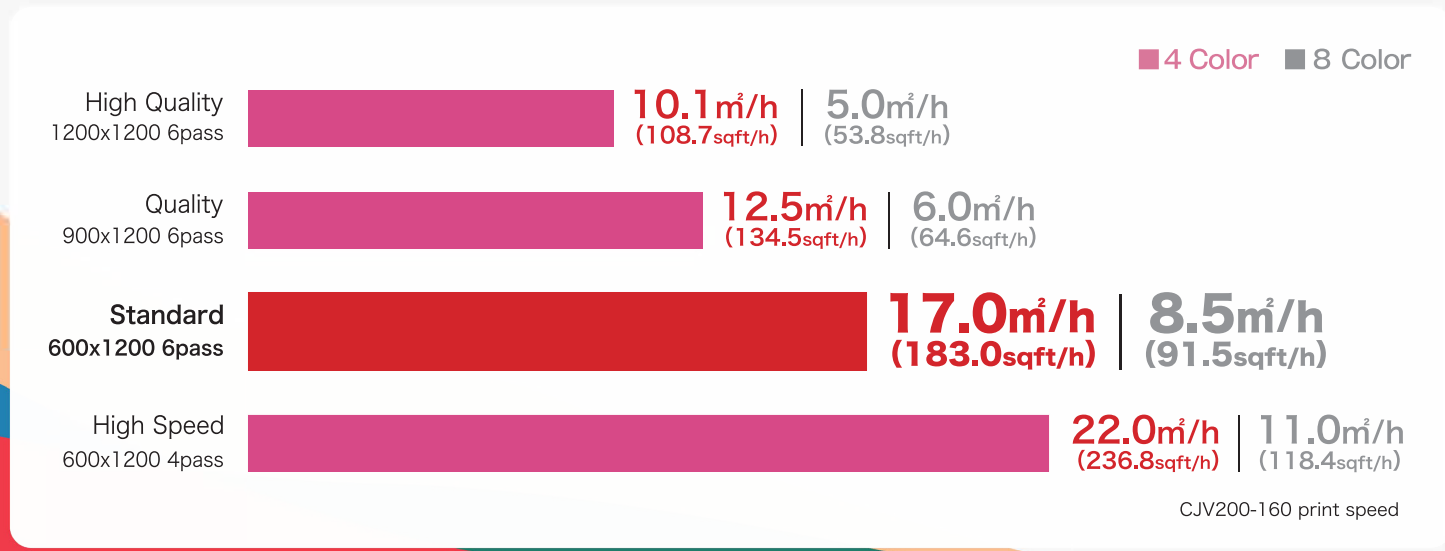


5-level adjustment from level 1 to level 5

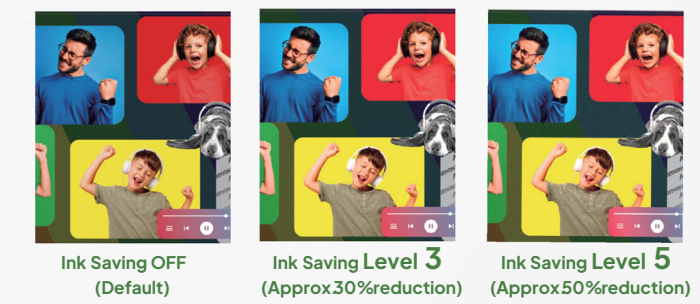

Simple Design Software




SimpleCreate software that allows you to create labels, POP, stickers, and other designs without a need of DTP software. It provides simple tools for creating designs and cutlines, as well as direct output from the software.

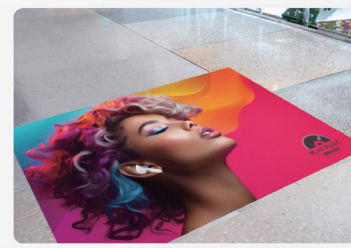

The operating status conditions of the printer and the amounts of inks used can be monitored remotely. PICT allows you to do other work during printing, helping you to perform operations in a planned manner.

You can also schedule maintenance and preparation for ink refilling in advance.




■Specifications

		CJV200 -160	CJV200 -130	CJV200 -75
Item				
Print head		On-demand piezo print head (single)		
Print resolution		X:600, 1200dpi Y:600, 900, 1200dpi		
Head gap		2levels by manual (1.5mm / 2.0mm)		
Ink	Type	SS21, SS22, BS4		
	Color	4color(C,M,Y,K) 8color(C,M,Y,K,Lc,Lm,Lk,Or)		
	Capacity	440ml		
Ink circulation		Yes		
Max.Load capacity		1620mm(63.8in)	1371mm(54in)	810mm(31.9in)
Max.Printable width		1610mm(63.4in)	1361mm(53.5in)	800mm(31.5in)
Media roll outer diameter		φ180mm or less (7.1in)		
Media roll weight		25kg (55.1 lb.) or less		
Media roll inside diameter		2 / 3 inch		
Cut function	Cut speed / acceleration	Speed:Max,300 mm/s Acceleration:Max. 0.5G		
	Cut pressure	10-450gf		
	Cutter response times	10 times / sec		
	Repeatability	±0.2 mm (Excluding expansion and contraction of film due to temperature)		
Interface		Ethernet 1000 BASE-TT(Recommended) / USB 2.0 Hi-speed		
Power		AC(100~120V/200~240V±10%)×2 50/60Hz±1Hz		
Power consumption		Max.1320W x2 / 4.5W or less (Sleep mode)		
Operational environment	Temperature	20 - 30 degC (68-86 degF)		
	Humidity	35 - 65% Rh (Non condensing)		
	Guaranteed accuracy temperature	20 - 25 degC (68 - 77 degF)		
	Dust level	Equivalent to general office		
Dimensions (WxDxH)		2,770mm × 748mm × 1,370mm (109 x 29 x 54 in)	2,520mm × 748mm × 1,370mm (99 x 29 x 54 in)	1,960mm × 748mm × 1,370mm (77 x 29 x 54 in)
Weight		140kg (309lb)	130kg (287lb)	105kg (231lb)

■Ink

Item	Color	Item No.	Remarks
BS4 600ml Ink Pack	Cyan	BS4-C-60	OPT-J0361 ECO CASE 4 is required for setup *2L ink pack is also available OPT-J0364 MBIS3 is required for setup
	Magenta	BS4-M-60	
	Yellow	BS4-Y-60	
	Black	BS4-K-60	
SS22 440ml Cartridge	Cyan	SS22-C-44	*1L ink pack is also available OPT-J0364 MBIS3 is required for setup
	Magenta	SS22-M-44	
	Yellow	SS22-Y-44	
	Black	SS22-K-44	
	Light Cyan	SS22-LC-44	
	Light Magenta	SS22-LM-44	
	Orange	SS22-OR-44	
SS21 440ml Cartridge *Scheduled for support in March 2025	Light Black	SS22-LK-44	*2L ink pack is also available OPT-J0364 MBIS3 is required for setup
	Cyan	SPC-0501C	
	Magenta	SPC-0501M	
	Yellow	SPC-0501Y	
	Black	SPC-0501K	
	Light Cyan	SPC-0501LC	
	Light Magenta	SPC-0501LM	
	Orange	SPC-0501Or	
	Light Black	SPC-0501Lk	

■Options

Item No.	Item	Image
OPT-J0422	NCU OPT	
OPT-J0364	MBIS3 bulk supply unit	
OPT-J0576	MBIS BKT OPT	
OPT-J0502	Level foot OPT	
OPT-J0578	160 cover OPT	
OPT-J0579	130 cover OPT	
OPT-J0580	75 cover OPT	
OPT-J0361	ECO CASE4	

●Some examples shown in this catalog are artificial renderings.●Specifications, designs and dimensions shown in this catalog may be subject to change without notice for technical improvements.●The corporate and merchandise names in this catalog are the trademarks or registered trademarks of the respective corporations.●Inkjet printers use extremely fine dots, so colors may vary slightly after replacement of print heads.●Also note that when using multiple printer units, colors could vary slightly from one unit to another due to slight individual differences.●Please note that descriptions and data in this catalog are as of September 2024



■Software

Raster Link 7

Combination of upgraded usability and functionality

- Improves reproducibility of special effects (such as transparency) of PDF data
- Increases RIP processing speed of PDF data by 25% on average
- Prints out the variable data by Variable print function
- Displays frequently used setting and pop-up windows

Mimaki[®]
For SignGraphics

Print & Cut Inkjet Printer **CJV200 series**
-160 / -130 / -75

A Perfect Print & Cut

The Mimaki CJV200

